

## 8.2 Seldén GX - Furling system for Gennakers/ Asymmetric spinnakers

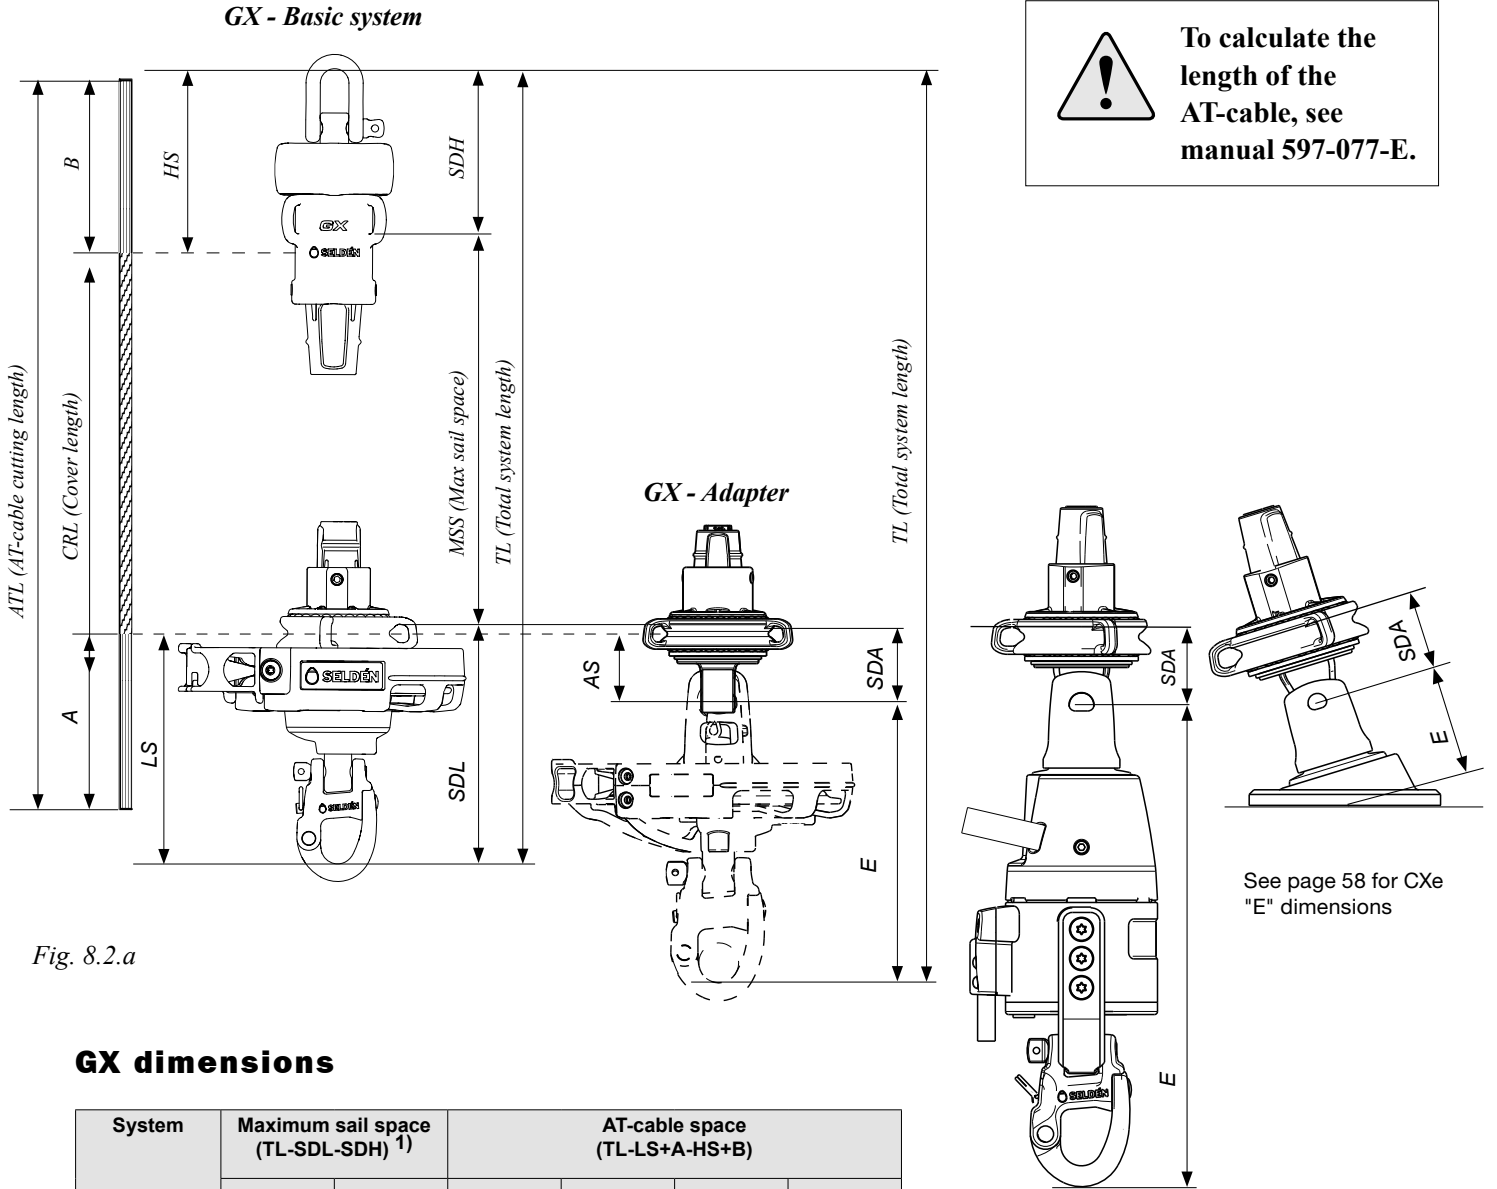


Fig. 8.2.a

### GX dimensions

System	Maximum sail space (TL-SDL-SDH) <sup>1)</sup>		AT-cable space (TL-LS+A+HS+B)			
	SDL mm	SDU mm	LS mm	HS mm	A mm	B mm
GX7.5	100	70	100	70	120	120
GX10	105	70	110	70	120	120
GX15	115	80	120	75	120	120
GX25	155	100	155	95	150	150

<sup>1)</sup> System Maximum sail space includes space for lashing rope.

### Dimension for GX tack adapter in combination with CX lower swivel

System	Adapter Part no.	AS adapter deduction	E CX lower swivel deduction	SDA sail deduction adapter
GX7.5 adapter - CX10	545-028-01	30	115	35
GX10 adapter - CX15	545-128-01	30	125	35
GX15 adapter - CX/CXe25	545-228-01	40	155	40
GX25 adapter - CX/CXe45 <sup>1)</sup>	545-428-01	45	190	50

<sup>1)</sup> Same values for CX40 as for CX45.

See page 58 for CXe "E" dimensions