

# Aluminium spinnaker poles



Seldén aluminium spinnaker poles give you fast and safe spinnaker handling. All the fittings have well-rounded edges to prevent personal injury and damage to equipment. The extrusions are lightweight and very durable, and are fitted with pole savers to shield the pole against damage from forestay and shrouds.

Composite end fittings are available for our Ø 48-Ø 96 poles. These fittings are normally used for end-for-end gybing but can be used for vertical pole stowage and dip gybing as well.

Our traditional aluminium fittings for dip gybing are available for the Ø 72-Ø 111 sections.

## Trip trigger

All aluminium fittings and composite fittings for Ø 72-Ø 111 poles are available with a trip trigger function. You open the end fitting with a control line and the sheet locks it automatically. This makes life easier for the fore-deck crew.

## Four good ways

There are four basic ways to handle the spinnaker. The end-for-end method, with the topping lift and downhaul attached to the centre of the spinnaker pole, is most suitable for boats up to 25 feet in length. Another end-for-end method, with the topping lift at the centre of the pole and



*Small composite end fitting with stainless chafe guard and Dyneema bridle for downhaul.*



*Medium composite end fitting with stainless chafe guard, trip trigger and Dyneema bridle for downhaul.*

*The aluminium extrusions are fitted with pole savers to shield the pole against damage from forestay and shrouds.*

the downhaul attached to the outboard end, is best for masthead rigged boats (max. 33 ft) and fractionally rigged boats (max. 40 ft). The third method, dip pole, is suitable for larger boats. The fourth way, twin pole arrangements, is recommended for yachts ranging from 40 feet and upwards. Twin poles make it much easier and safer to gybe with the spinnaker on a big yacht.

### Section data

|  | Section dia., mm | $I_y$ cm <sup>4</sup> | $I_x$ cm <sup>4</sup> | Wall thickness, mm | Weight kg/m |
|--|------------------|-----------------------|-----------------------|--------------------|-------------|
|  | 48/48            | 7.65                  | 7.65                  | 2.0                | 0.75        |
|  | 60/60            | 15.4                  | 15.4                  | 2.0                | 1.00        |
|  | 72/72            | 29.9                  | 29.9                  | 2.2                | 1.38        |
|  | 84/84            | 48.0                  | 48.0                  | 2.2                | 1.53        |
|  | 96/96            | 72.3                  | 72.3                  | 2.2                | 1.76        |
|  | 99/99            | 123                   | 123                   | 3.6                | 2.65        |
|  | 111/111          | 197                   | 197                   | 4.1                | 3.38        |

### Composite spinnaker pole fittings

A lightweight composite fitting for fast and easy spinnaker handling. Stainless, spring loaded plunger. These fittings can be used for end-for-end gybing as well as vertical pole stowage and dip gybing.

Spinnaker poles with composite fittings come with Dyneema-core bridles for topping lift and downhaul. Can be secured in place without removing the fittings from the tube, which also makes it easier to change or adjust the bridles.

# Ready, set, go



*Hook up the spinnaker. Set up the spinnaker pole, topping lift and downhaul. Adjust the pole to suitable sailing trim. Haul in the windward guy. Also, haul in the leeward sheet to prevent the sail from twisting.*



*Hoist the spinnaker. It is a good idea if someone assists at the mast. Let the halyard run through a closed rope stopper. That way, you will not lose it if it fills early.*



*Make sure that the spinnaker runs free from the bag or through the forepeak hatch.*



*Call out "Top!" when the spinnaker is fully hoisted.*



*Adjust the guy and sheet.*



*Tidy up and hand in the jib.*



*When taking down the spinnaker, release the halyard first, followed by the leeward sheet. Do not release the windward guy until the spinnaker is fully down. If you want to read more about spinnaker sailing please order our free brochure, Using a spinnaker, Art. No. 595-560-E.*

## Selecting the right pole


Just look in the appropriate table for your yacht's displacement or righting moment (RM) at 30° heel, then look right for the value exceeding your SPL or J value (shown in the sail plan).

Example: For an aluminium spinnaker pole. Yacht displacement 8.0 tonnes, SPL is 6100 mm. The correct section is 99/99.



### Table terminology

RM: Righting moment at 30° of heel.

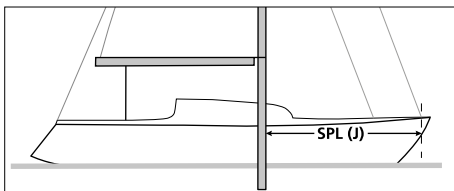

SPL (J): Maximum spinnaker pole length for your yacht.

A whisker pole should be approximately as long as the foot of the sail you intend to pole out.

#### Topping lift

When SPL is within 500 mm of a dimension shown in **bold blue**, a bridle topping lift is recommended if downhaul is at outboard end of pole. For 99/99 and larger diameter poles, use outboard end lift only.

#### Downhaul

Poles should have downhaul attached via a bridle or at outboard end. If a central attachment is desired, the pole diameter must be increased to the next size up.

### Aluminium spinnaker pole selection max SPL (mm)

| RM 30°<br>kNm | Displ.<br>tonnes | 48/48 | 60/60       | 72/72*      | 84/84*      | 96/96       | 99/99 | 111/111 |
|---------------|------------------|-------|-------------|-------------|-------------|-------------|-------|---------|
| 8             | 1.6              | 3000  |             |             |             |             |       |         |
| 10            | 2.0              | 2700  |             |             |             |             |       |         |
| 12            | 2.4              | 2500  | 3600        |             |             |             |       |         |
| 14            | 2.8              | 2400  | <b>3500</b> |             |             |             |       |         |
| 16            | 3.2              | 2350  | <b>3400</b> |             |             |             |       |         |
| 18            | 3.6              | 2300  | <b>3300</b> |             |             |             |       |         |
| 20            | 4.0              | 2250  | <b>3200</b> | <b>4650</b> |             |             |       |         |
| 25            | 5.0              |       | <b>3000</b> | <b>4250</b> |             |             |       |         |
| 30            | 5.7              |       | <b>2850</b> | <b>3905</b> | <b>5010</b> |             |       |         |
| 35            | 6.3              |       | <b>2730</b> | <b>3720</b> | <b>4710</b> |             |       |         |
| 40            | 7.0              |       | <b>2600</b> | <b>3520</b> | <b>4460</b> | <b>5480</b> |       |         |
| 45            | 7.7              |       |             | <b>3360</b> | <b>4260</b> | <b>5230</b> |       |         |
| 50            | 8.2              |       |             | <b>3220</b> | <b>4080</b> | <b>5010</b> | 6530  |         |
| 55            | 9.0              |       |             |             | <b>3930</b> | <b>4820</b> | 6290  |         |
| 60            | 10               |       |             |             |             | <b>4660</b> | 6070  |         |
| 70            | 11               |       |             |             |             | <b>4380</b> | 5710  | 7230    |
| 80            | 12               |       |             |             |             | <b>4150</b> | 5410  | 6580    |
| 90            | 14               |       |             |             |             |             | 4950  | 6540    |
| 100           | 15               |       |             |             |             |             | 4770  | 6270    |
| 110           | 16               |       |             |             |             |             | 4600  | 6030    |
| 120           | 18               |       |             |             |             |             |       | 5830    |
| 130           | 19               |       |             |             |             |             |       | 5640    |
| 140           | 20               |       |             |             |             |             |       | 5330    |
| 150           | 22               |       |             |             |             |             |       | 5190    |
| 160           | 23               |       |             |             |             |             |       | 4950    |
| 180           | 26               |       |             |             |             |             |       | 4750    |
| 200           | 28               |       |             |             |             |             |       |         |
| 220           | 31               |       |             |             |             |             |       |         |
| 240           | 34               |       |             |             |             |             |       |         |

\* Max available SPL with composite end fittings, attached to a fixed mast ring. If the pole is to be "Dip Gybe", max available SPL is increased by 165 mm.



### Aluminium whisker pole selection max pole length (mm)

| RM 30°<br>kNm | Displ.<br>tonnes | 48/48 | 60/60 | 72/72 | 84/84 | 96/96 | 99/99 |
|---------------|------------------|-------|-------|-------|-------|-------|-------|
| 12            | 2.4              | 3200  |       |       |       |       |       |
| 14            | 2.8              | 3200  |       |       |       |       |       |
| 16            | 3.2              | 3200  |       |       |       |       |       |
| 18            | 3.6              | 3200  |       |       |       |       |       |
| 20            | 4.0              | 3150  | 4700  |       |       |       |       |
| 25            | 5.0              | 2800  | 4700  | 5240  |       |       |       |
| 30            | 5.7              | 2550  | 4700  | 5240  | 5240  |       |       |
| 35            | 6.3              |       | 4400  | 5240  | 5240  |       |       |
| 40            | 7.0              |       | 4100  | 5210  | 5240  |       |       |
| 45            | 7.7              |       | 3800  | 4970  | 5240  |       |       |
| 50            | 8.2              |       | 3650  | 4770  | 5240  | 6280  |       |
| 55            | 9.0              |       |       | 4590  | 5240  | 6280  | 6530  |
| 60            | 10               |       |       | 4430  | 5240  | 6280  | 6530  |
| 70            | 11               |       |       |       | 5240  | 6280  | 6530  |
| 80            | 12               |       |       |       | 5010  | 6140  | 6530  |
| 90            | 14               |       |       |       |       | 5860  | 6530  |
| 100           | 15               |       |       |       |       |       | 6530  |
| 110           | 16               |       |       |       |       |       | 6530  |




#### Downhaul

Poles should have the downhaul attached via a bridle or at the outboard end. If a central attachment is desired, the pole diameter must be increased to the next size up.

# Spinnaker pole kits

There is no need to wait for Seldén to build your customized spinnaker pole. You can easily build it yourself from one of our kits. Your local Seldén dealer will, of course, be happy to do the job for you.

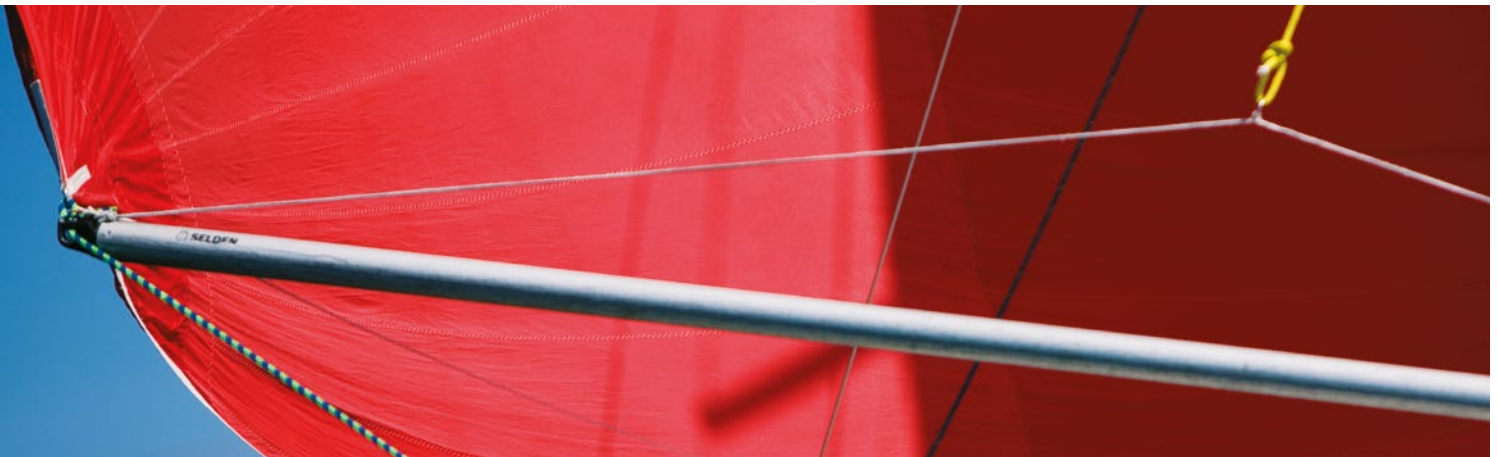

## Aluminium spinnaker pole kits

Fittings designed for:  
End-for-end gybing, dip pole gybing and vertical pole stowage.

| Art. No.     | Section, dia., mm | Max spinnaker pole length, mm | Type of end fitting |
|--------------|-------------------|-------------------------------|---------------------|
| 048-048-54   | 48                | 3180                          | 2 of 534-865        |
| 060-060-54   | 60                | 3720                          |                     |
| 060-060-68   |                   | 5220                          | 2 of 534-854*       |
| 072-072-57   | 72                | 4180                          |                     |
| 072-072-68   |                   | 5180                          | 2 of 534-854*       |
| 084-084-57   | 84                | 4720                          |                     |
| 084-084-68   |                   | 5220                          |                     |
| 096-096-68** | 96                | 6260                          |                     |

\* Trip trigger retrofit kit, Art. No. 534-857-01.

\*\* Only to be used as a whisker pole.

## Aluminium spinnaker pole kits

Fittings designed for: Dip pole gybing and vertical pole stowage.

| Art. No.   | Section dia., mm | Max spinnaker pole length, mm | Type of end fitting                          |
|------------|------------------|-------------------------------|--|
| 072-072-67 | 72               | 5245                          | 534-854* Outboard end<br>534-778 Inboard end |
| 084-084-67 | 84               | 5285                          |  |
| 096-096-67 | 96               | 6500                          | 534-777 Outboard end<br>534-778 Inboard end  |
| 099-099-67 | 99               | 6500                          |  |

\* Trip trigger retrofit kit, Art. No. 534-857-01.

## Single tapered Carbon spinnaker poles - Made to order. Tapered outer end.





Fittings designed for dip gybing and vertical pole stowage.

Includes; Outboard end with trip-trigger function, trip-line, retraction cord for spinnaker lift and lift-eye.

| Art. No   | Section Dia., mm | Max spinnaker pole length, mm | Type of end fitting   |
|-----------|------------------|-------------------------------|-----------------------|
| SSC102-54 | 102              | 6340                          | Inboard end: 534-778  |
| SSC119-54 | 119              | 8340                          | Outboard end: 534-777 |

## Carbon spinnaker pole kits


Fittings designed for: End-for-end gybing, dip pole gybing and vertical pole stowage.

| Art. No.   | Section Dia., mm | Max SPL, mm | Type of end fitting   | Carbon tube only | Section Dia., mm | Max length mm |
|------------|------------------|-------------|---|------------------|------------------|---------------|
| 047-047-01 | 47               | 2680        | 2 of 534-865  |                  |                  |               |
| 047-047-02 |                  | 3180        |   |                  |                  |               |
| 047-047-03 |                  | 3680        |   | 535-549-03       | 47               | 3500          |
| 059-059-01 | 59               | 3220        |  |                  |                  |               |
| 059-059-02 |                  | 3720        |   |                  |                  |               |
| 059-059-03 |                  | 4220        |   | 535-550-03       | 59               | 4000          |
| 061-061-01 | 61               | 3220        |  |                  |                  |               |
| 061-061-02 |                  | 3720        |   |                  |                  |               |
| 061-061-03 |                  | 4220        |   | 535-554-03       | 61               | 4000          |
| 061-061-04 |                  | 5220        |   | 535-554-04       | 61               | 5000          |
| 077-077-01 | 77               | 3680        | 2 of 534-854*   |                  |                  |               |
| 077-077-02 |                  | 4480        |   |                  |                  |               |
| 077-077-03 |                  | 4780        |   | 535-567-03       | 77               | 4600          |
| 088-088-01 | 88               | 4230        |  |                  |                  |               |
| 088-088-02 |                  | 4930        |   | 535-552-02       | 88               | 4700          |
| 088-088-03 |                  | 5430        |   | 535-552-03       | 88               | 5200          |
| 090-090-01 | 90               | 4230        |  |                  |                  |               |
| 090-090-02 |                  | 4930        |   |                  |                  |               |
| 090-090-03 |                  | 5430        |   | 535-564-03       | 90               | 5200          |

\* Trip trigger retrofit kit, Art. No. 534-857-01. SPL = Spinnaker Pole Length.

## Carbon spinnaker pole kits

Fittings designed for: End-for-end gybing, dip pole gybing and vertical pole stowage.

| Art. No.   | Section dia., mm | Max spinnaker pole length, mm | Type of end fitting   |
|------------|------------------|-------------------------------|---|
| 077-077-21 | 77               | 3755                          | Inboard end, 534-778  |
| 077-077-22 |                  | 4555                          |   |
| 077-077-23 |                  | 4855                          |   |
| 088-088-21 | 88               | 4295                          | Outboard end, 534-854*  |
| 088-088-22 |                  | 4995                          |   |
| 088-088-23 |                  | 5495                          |   |
| 090-090-21 | 90               | 4295                          |  |
| 090-090-22 |                  | 4995                          |   |
| 090-090-23 |                  | 5495                          |   |

\* Trip trigger retrofit kit, Art. No. 534-857-01.

## Tools for working with carbon fibre

| Art. No. | Description   | Used for section, dia., mm |
|----------|---------------|----------------------------|
| 592-079  | Drill Ø 4,1   | -                          |
| 592-080  | Drill Ø 4,8   | 47, 59, 61                 |
| 592-081  | Drill Ø 6,4   | 77, 88, 90                 |
| 592-102  | Hacksaw blade | All                        |

**Warning:** Always use breathing protection when drilling or cutting carbon products.

## Twaron protection

Protects the pole from damage from the forestay, rail impact, etc. Two protectors needed for end-for-end poles.

| For section, mm | One protector, for dip pole gybing, Art. No. | Two protectors, for end-for-end gybing, Art. No. |
|-----------------|--|--|
| 59              | -  | 535-586-02                                       |
| 61              | -  | 535-593-02                                       |
| 77              | 535-599-01                                   | 535-599-02                                       |
| 88              | 535-588-01                                   | 535-588-02                                       |
| 90              | 535-594-01                                   | 535-594-02                                       |



## Bridle kit

Includes Ø4 mm HMPE\* rope and stainless steel ring.

| Art. No.   | For max spinnaker pole length, mm |
|------------|-----------------------------------|
| 613-051-04 | 3250                              |
| 613-051-05 | 4500                              |
| 613-051-06 | 5500                              |

\* High modulus polyethylene.

## Exit box for trip line

For dip pole gybing, the trip line must exit through an exit box. For further information, see instruction 595-415-E on [www.seldenmast.com](http://www.seldenmast.com).

| Art. No.   | Dimensions, mm |
|------------|----------------|
| 505-069-11 | 21x9           |

