


Winch pads

The Seldén winch pads fit all mast sections and are easy to install. Each winch pad is labelled with instructions for fitting to winch bases. The pads have a 5° angle to prevent override on the winch (reefing winch pads 15°). They are corrosion insulated with plastic insulating sheet and have well-rounded corners to avoid sail chafe. Seldén offers winch pads for halyard winches and reefing winches.

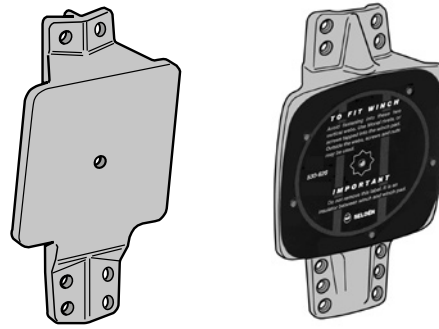

| 5° Halyard winch pads incl. insulating sheet | | | | | 15° Reefing winch pads incl. insulating sheet | | Stopper pad |
|--|------------|---------------------|------------------------------|--------------------|---|------------------------------|-------------|
| Art. No. | 523-043-01 | 523-041-01 | 523-042-01 | 523-044-01 | - | 523-045-01 | 523-048-01 |
| | | | | | 523-057-01* | 523-056-01* | |
| Dimension, mm | 85 x 85 | 110 x 110 | 140 x 140 | 180 x 180 | 100 x 100 | 140 x 140 | 150 x 106 |
| Safe working load | 3 kN | 5 kN | 10 kN | 15 kN | 5 kN | 10 kN | 20 kN |
| Max. winch | | | | | | | |
| Andersen | | 6, 10, 12 ST, 16 ST | 28, 28 ST, 40, 40 ST | | 6, 10, 12 ST, 16 | 28, 28 ST, 40, 40 ST | |
| Lewmar | | 6, 7, 8 | 16, 26, 30, 30 ST, 40, 40 ST | | 6, 7, 8 | 16, 26, 30, 30 ST, 40, 40 ST | |
| Seldén | | | | R30, R40, R46, R52 | | | |

ST = Self tailing

* For C-sections with wider luff-grooves.

Cleats



Art. No. 511-030-01.



Art. No. 511-016-02.



Art. No. 511-015-02.



Art. No. 511-025-02.



Art. No. 511-031-02.

| Art. No. | Material | C-C, mm | Length, mm | Fasteners included in kit |
|------------|-----------|---------|------------|---------------------------|
| 511-030-01 | Composite | 19 | 100 | 2 rivets, Ø 4.8 |
| 511-016-02 | Composite | 40 | 145 | 2 screws, MRT 6 x 16* |
| 511-015-02 | Aluminium | 45 | 165 | 2 screws, MRT 6 x 16* |
| 511-025-02 | Aluminium | 53 | 195 | 2 screws, MRT 6 x 16* |
| 511-031-02 | Composite | 45 | 156 | 2 screws, MRT 6 x 25* |

* Self tapping screws.