



CLEW BLOCK


With sheave or Low friction insert



The smallest Clew block in the market

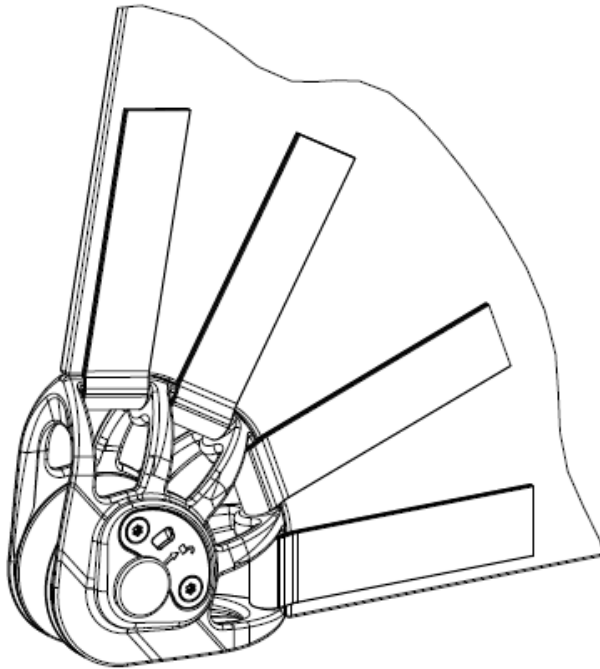

Parts.

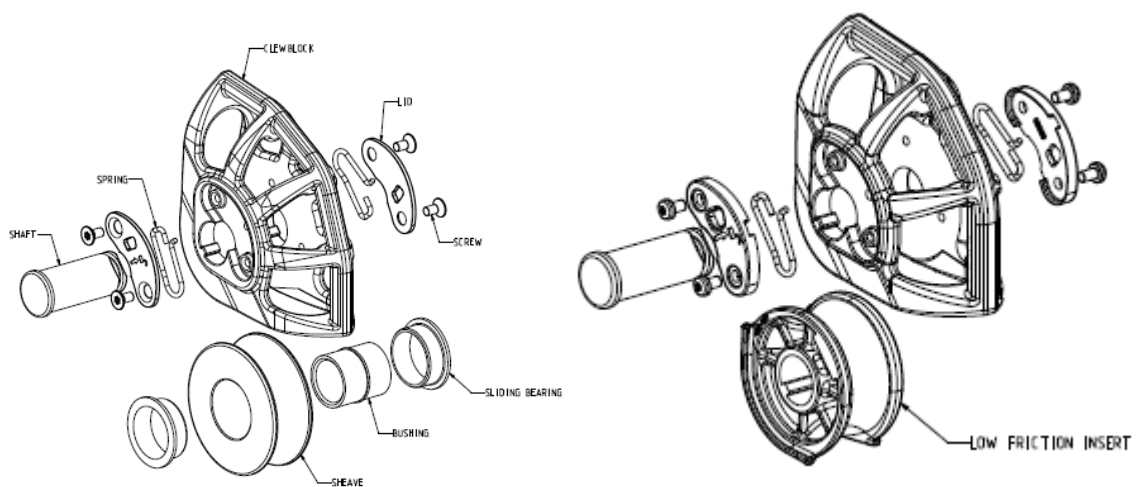

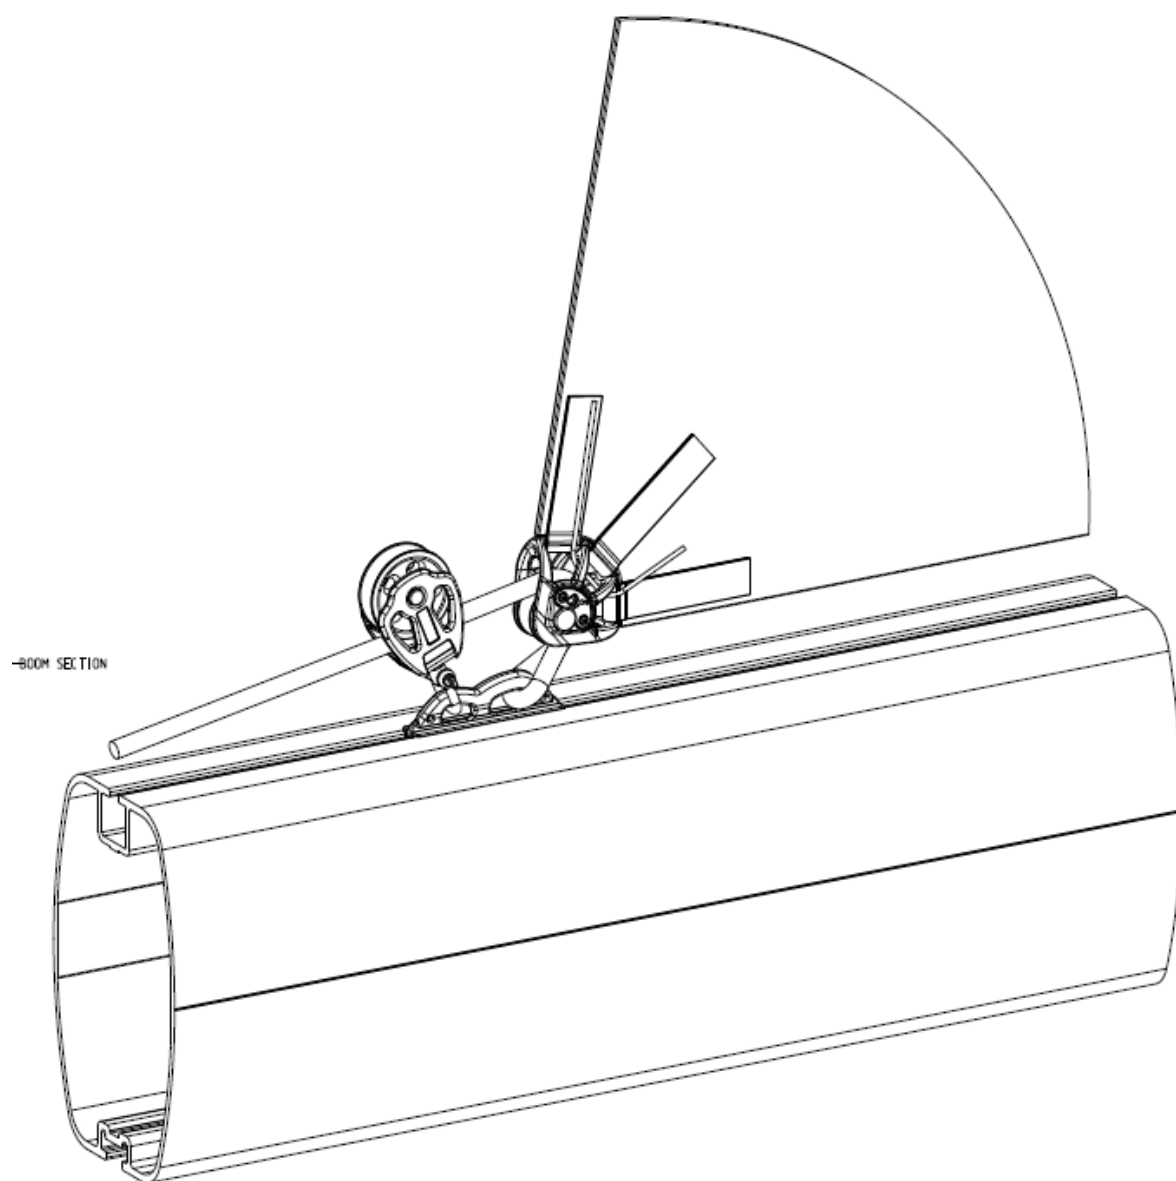

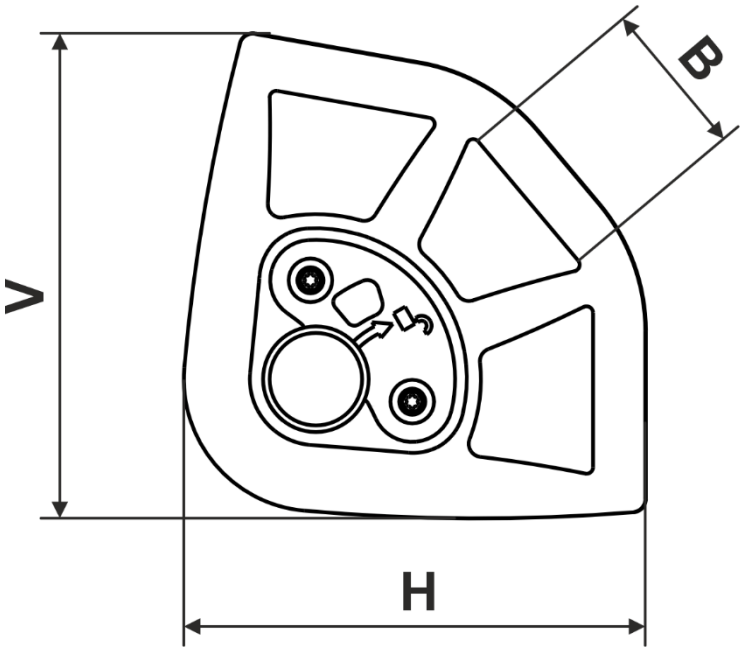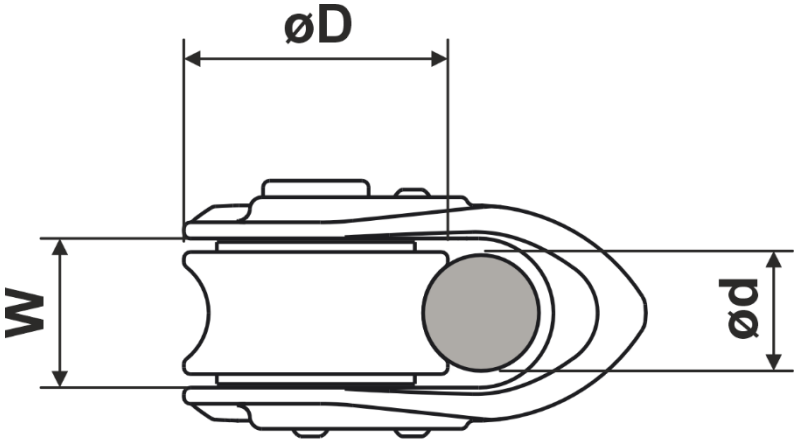


Clew blocks

Clew blocks													
ItemNo	Name	Safe Working Load (kN)	Breaking Load (kN)	V (mm)	H (mm)	øD (mm)	W (mm)	B Webbing (mm)	ød (Max Line) (mm)	Max Rm FR (kNm)	Max Rm Mh (kNm)	Max Rec. Boat Size* (Feet)	Image
462-302-01	CLB10	10.00	20.00	71	68	40	19	3x25	12	65	85	44	
462-402-01	CLB15	15.00	30.00	74	70	40	23	3x25	14	115	150	54	
462-502-01	CLB25	25.00	50.00	103	98	60	27	4x25	16	240	320	65	
462-702-01	CLB40	40.00	80.00	150	142	100	39	4x40	18	450	600	80	

*Please note, guidelines only...


Rm...

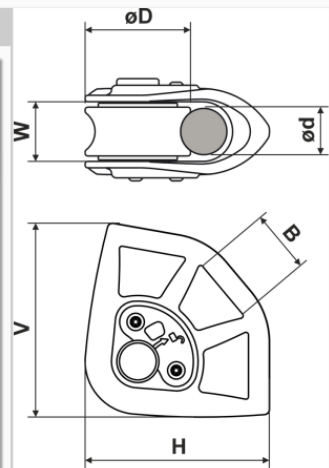

Clew blocks													
ItemNo	Name	Safe Working Load (kN)	Breaking Load (kN)	V (mm)	H (mm)	øD (mm)	W (mm)	B Webbing (mm)	ød (Max Line) (mm)	Max Rm FR (kNm)	Max Rm Mh (kNm)	Max Rec. Boat Size* (Feet)	Image
462-302-02	CLB10, LFI	10.00	20.00	73	70	40	19	3x25	12	65	85	44	
462-402-02	CLB15, LFI	15.00	30.00	75	72	40	23	3x25	14	115	150	54	
462-502-02	CLB25, LFI	25.00	50.00	105	100	60	27	4x25	16	240	320	65	

*Please note, guidelines only...



Rm...

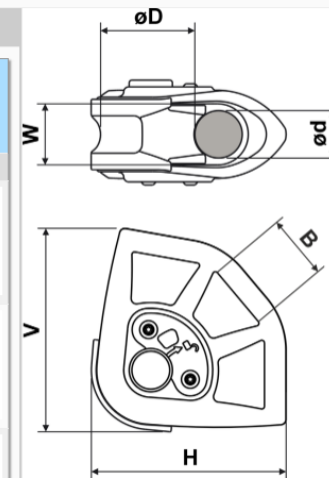

CLB40

Design features

- Stainless casting
- Small cutout in sail
- 40 mm sheave
- Plain bearing
- Captive pin
- For 25 mm webbing bands
- Low friction ring option
- Removable Sheave

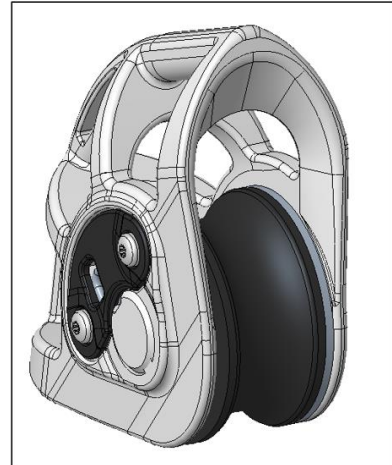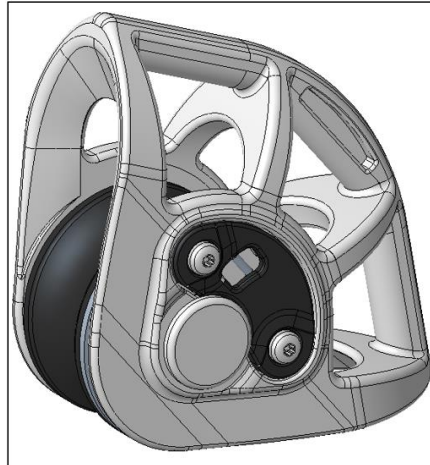

CLB40

Removable "Low Friction Ring")

