

Mast coat replacement kit

This instruction applies for:

534-053-51

530-054-51

530-055-51


530-056-51

530-058-51


534-060-51

Note: Sealing compound to be bought separately.


Assembly

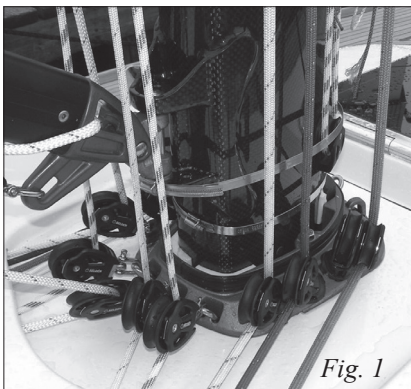


1. Remove the old mast coat.

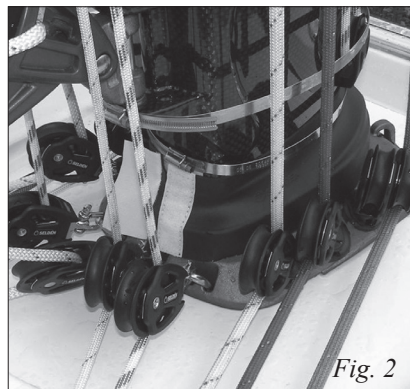


2. Fit the new mast coat around the mast.

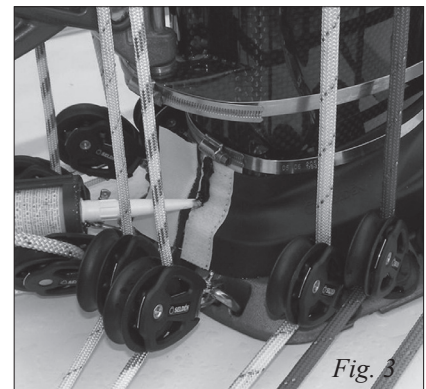

3. Apply a small amount of sealing compound on the Velcro.

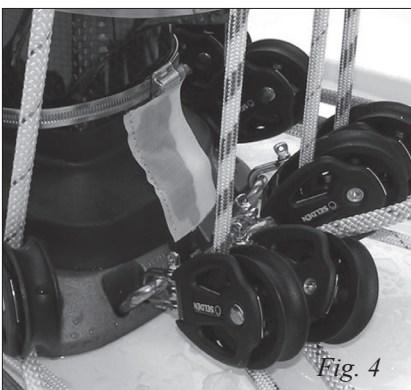

4. Close the Velcro, and place the mast coat at the same height as the old one.

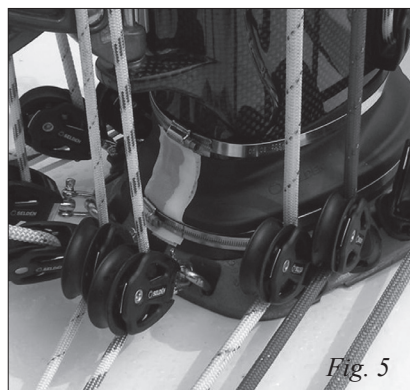

5. Fit the clip rings.

