


Connection to Seldén Power supply and SEL-Bus system

Connect the cables from the drive unit to the CXe Motor Control Unit contacts marked L1, L2, and L3 as shown in the picture below. For correct positioning of the Motor Control Unit and installation of the complete Power supply and SEL-Bus system, see separate manual 597-275.



597-275-E

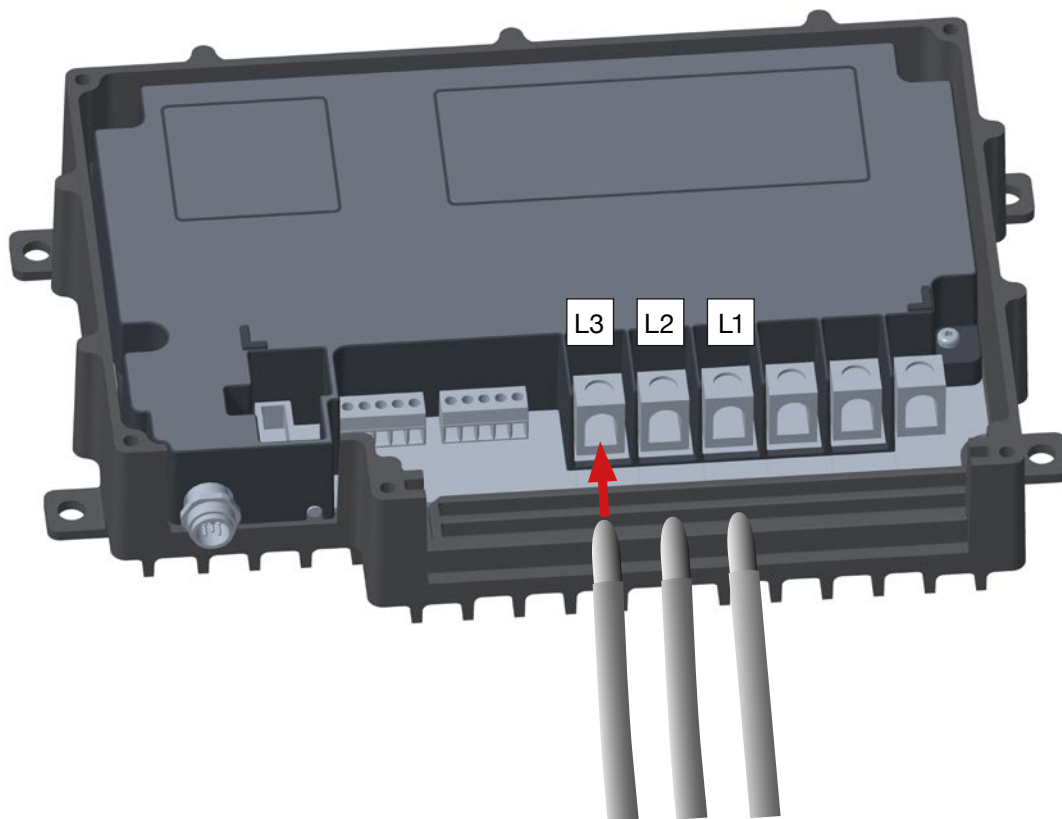

CXe comes with three black cables to be positioned in connectors L3, L2 and L1 in no particular order.



If opposite furling direction is desired (e.g. due to position of UV-protection in sail), this can be done by switching the position of cables L1 and L2.

Using crimp terminals on the cables will improve the connection between the cables and the control unit.