


# Winch pads

The Seldén winch pads fit all mast sections and are easy to install. Each winch pad is labelled with instructions for fitting to winch bases. The pads have a 5° angle to prevent override on the winch (reefing winch pads 15°). They are corrosion insulated with plastic insulating sheet and have well-rounded corners to avoid sail chafe. Seldén offers winch pads for halyard winches and reefing winches.

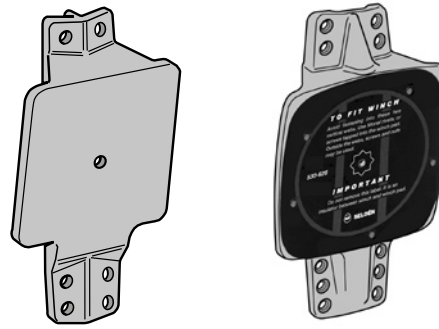

5° Halyard winch pads incl. insulating sheet					15° Reefing winch pads incl. insulating sheet		Stopper pad
Art. No.	523-043-01	523-041-01	523-042-01	523-044-01	-	523-045-01	523-048-01
					523-057-01*	523-056-01*	
Dimension, mm	85 x 85	110 x 110	140 x 140	180 x 180	100 x 100	140 x 140	150 x 106
Safe working load	3 kN	5 kN	10 kN	15 kN	5 kN	10 kN	20 kN
Max. winch							
Andersen		6, 10, 12 ST, 16 ST	28, 28 ST, 40, 40 ST		6, 10, 12 ST, 16	28, 28 ST, 40, 40 ST	
Lewmar		6, 7, 8	16, 26, 30, 30 ST, 40, 40 ST		6, 7, 8	16, 26, 30, 30 ST, 40, 40 ST	
Seldén				R30, R40, R46, R52			

ST = Self tailing

\* For C-sections with wider luff-grooves.

# Cleats



Art. No. 511-030-01.



Art. No. 511-016-02.



Art. No. 511-015-02.



Art. No. 511-025-02.



Art. No. 511-031-02.

Art. No.	Material	C-C, mm	Length, mm	Fasteners included in kit
511-030-01	Composite	19	110	2 rivets, Ø 4.8
511-016-02	Composite	40	145	2 screws, MRT 6 x 16*
511-015-02	Aluminium	45	165	2 screws, MRT 6 x 16*
511-025-02	Aluminium	53	195	2 screws, MRT 6 x 16*
511-031-02	Composite	45	156	2 screws, MRT 6 x 25*

\* Self tapping screws.